




POWER CESS 1500

INDUSTRIAL CONTAINER ENERGY STORAGE SYSTEM

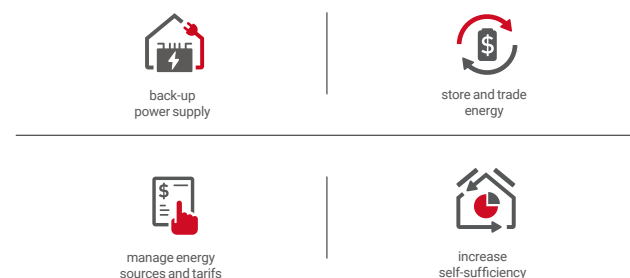

POWER CESS 1500

RELIABLE POWER SUPPLY

- 1491 kWh outdoor-rated container storage system
- AC coupled system

SAFE TECHNOLOGY


- Multi-level protection
- Lithium iron phosphate (LFP) chemistry provides highest level of safety, thermal stability and reliability
- Preinstalled liquid cooled RCT Power Battery modules
- Integrated multi-level battery management system (BMS) assures optimized and well-balanced power storage

ENERGY MANAGEMENT SYSTEM

- Back-up power
- Peak shaving
- Micro-grids
- Demand mitigation
- Rate arbitration

SMART & HIGH EFFICIENCY

- Highly efficient AC/DC inverter
- Smart energy monitoring cloud platform for remote monitoring and control
- Intelligent charging and reduction of peak loads
- High degree of performance
- Multi-parallel system supported

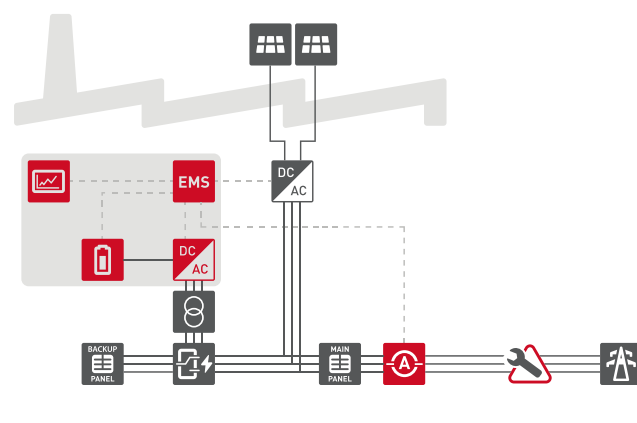

POWER CESS

1500

BATTERY

Nominal capacity	1491 kWh
Usable capacity	1394 kWh
Battery technology	LFP
Charge/discharge rate	0.5 P (constant power)
Cooling method	liquid cooling
BMS (battery management system)	integrated
Rated voltage	1331 Vdc
Voltage range	1144 Vdc - 1485 Vdc
Battery life cycle	≥ 6000 times @25 °C ±2 °C, 100 % DOD, 80 % SOH EOL

INVERTER

Rated AC power	748kW (187 kW x 4)
Grid Transformer	not included
DC-side operating voltage range	1060 - 1450 Vdc
Rated AC current	624 A (156 A x 4)
AC line voltage	690 Vac (- 15 % to 10 %)
Rated AC line voltage	690 Vac
Rated AC line frequency	50 Hz
Current harmonics	< 3 % @ rated AC power

ENERGY MANAGEMENT SYSTEM

EMS	integrated
-----	------------

COMMUNICATION

Touch panel	15,6" industrial standard
Communication protocol	Modbus TCP
Cloud	yes
App	yes

OPERATION

Relative operating humidity	0-95 %, no-condensation
Operating temperature range	-25 °C ~ +45 °C
Operating altitude	≤ 2000 m

DIMENSIONS

Dimensions (L x H x D)	2991 x 2896 x 2438 mm
Weight	aprox 16600 Kg

SAFETY / STANDARDS

Protection	IP54
Safety features	a. Flammable / explosive gas detection b. Flammable / explosive gas exhaust c. Smoke detection d. Temperature detection e. Aerosol fire extinguish f. Siren and strobe alarm g. Emergency stop button h. Dry pipe and sprinkle i. Fire alarm control panel
Certification	EN IEC 62619, EN IEC 63056, EN 62477-1, EN 61000-6-2/-4, UN38.3, EN IEC 60730-1, EN 62109-1/-2, EN 62477-1, EN 61000-6-2/-4, EN 62933-5-2, NRS097-2-1/BESF, VDE-AR-N 4105, VDE-AR-N 4110, CE declaration

WARRANTY

Warranty	5 years (option: 10 years)
----------	----------------------------

© RCT Power. Revision reserved. Pictures and data may differ. 2024V1 AU